

Pin, nose L/G center lock disengage (GF-43-00) - Support equipment and tools data

Table of contents

References

- | | |
|---|--------------|
| 1 | Application |
| 2 | Dimensions |
| 3 | Mass (total) |
| 4 | Parts List |

List of tables

- | | |
|---|-------------------------------------|
| 1 | References |
| 2 | Pin, nose L/G center lock disengage |

List of figures

- | | |
|---|-------------------------------------|
| 1 | Pin, nose L/G center lock disengage |
|---|-------------------------------------|

References

Table 1 References

Data Module	Title
No References	

Description

1 Application

This tool is use to unlock the Nose Landing Gear (NLG) centering block mechanism. It must be used in conjunction with the tow bar assy when towing the helicopter.

2 Dimensions

- Length: 940 mm (37 in)
- Height: 30 mm (1,18 in)
- Width: 25 mm (0,98 in)

3 Mass (total)


- Mass:

4 Parts List

Refer to Figure 1 .

Table 2 Pin, nose L/G center lock disengage

Fig ref	Part Number	Nomenclature	Units per assembly
1-00	3G3205G00231	Pin, nose L/G center lock disengage	1

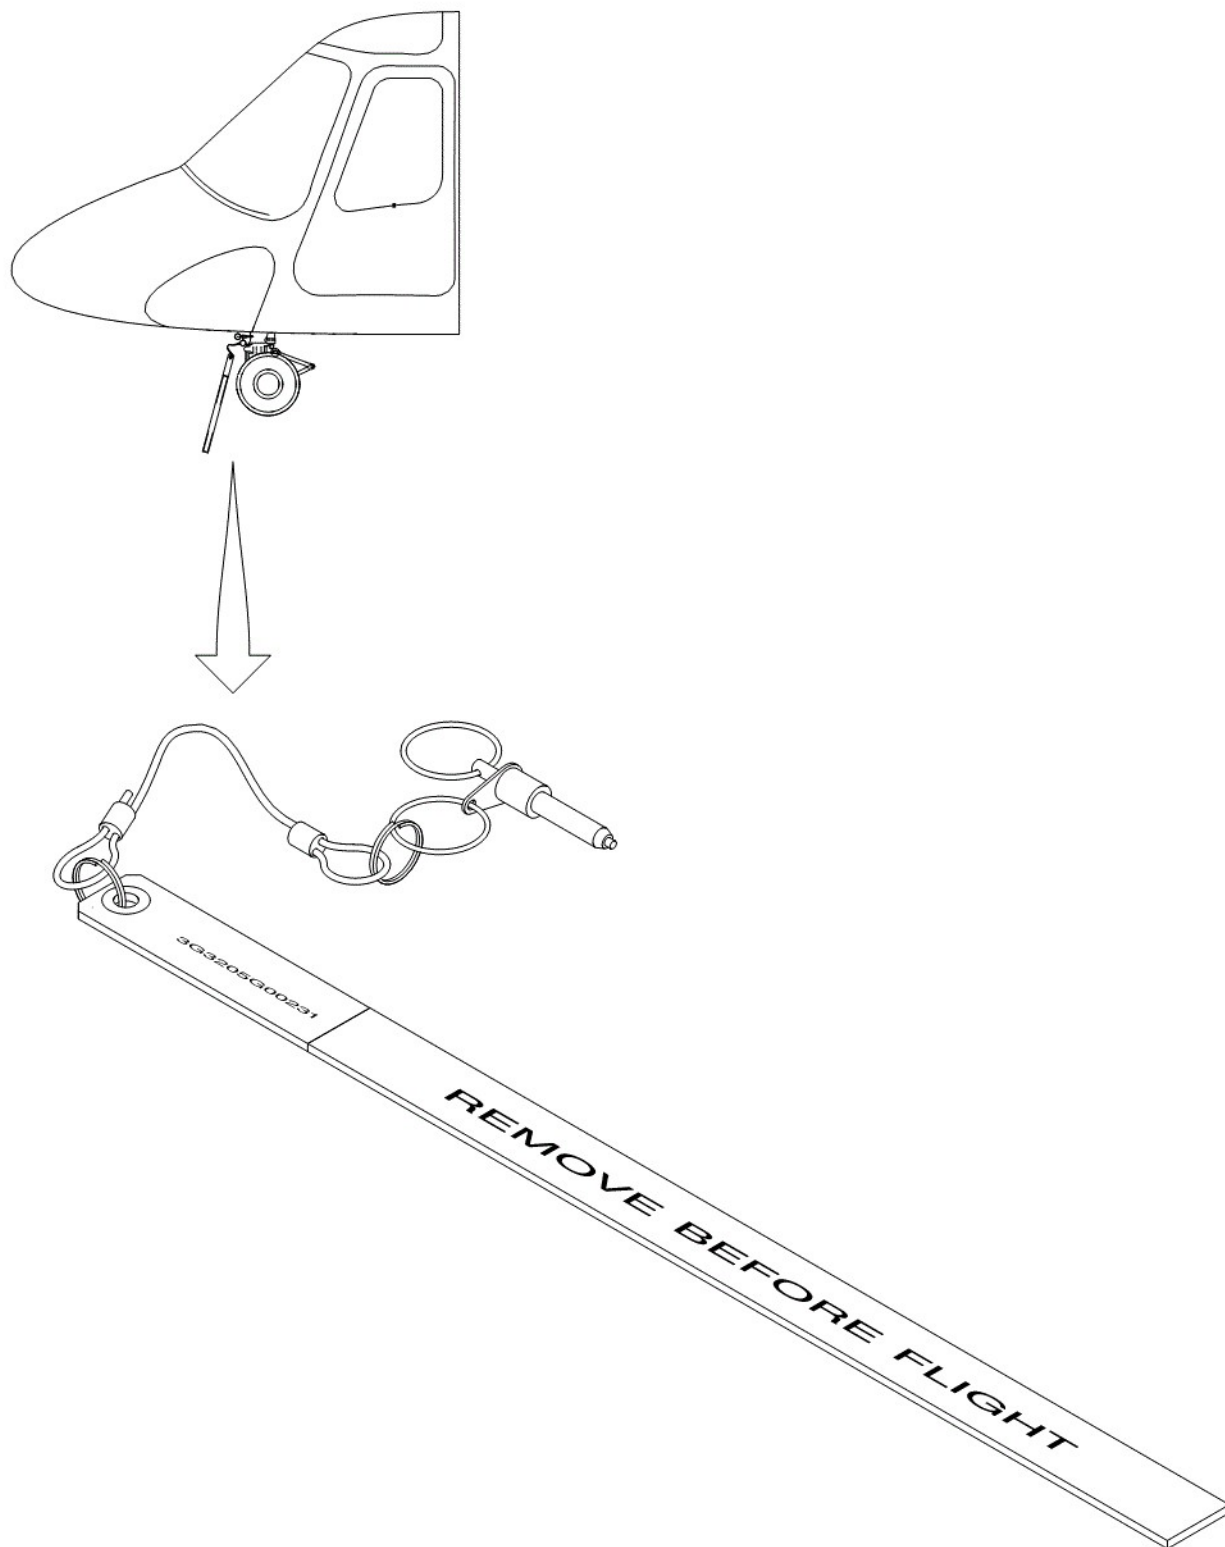

ICN-39-A-GF4300-A-00002-00093-A-001-01

Figure 1 Pin, nose L/G center lock disengage