



GSE & TOOL USE AND MAINTENANCE MANUAL


Manual number:
MAN-8G6000G01632
REV. A

Pag. 1 of 25

GSE & TOOL MANUAL

TITLE

TOOL KIT, ROTORS PLAY CHECK
P/N 8G6000G01632

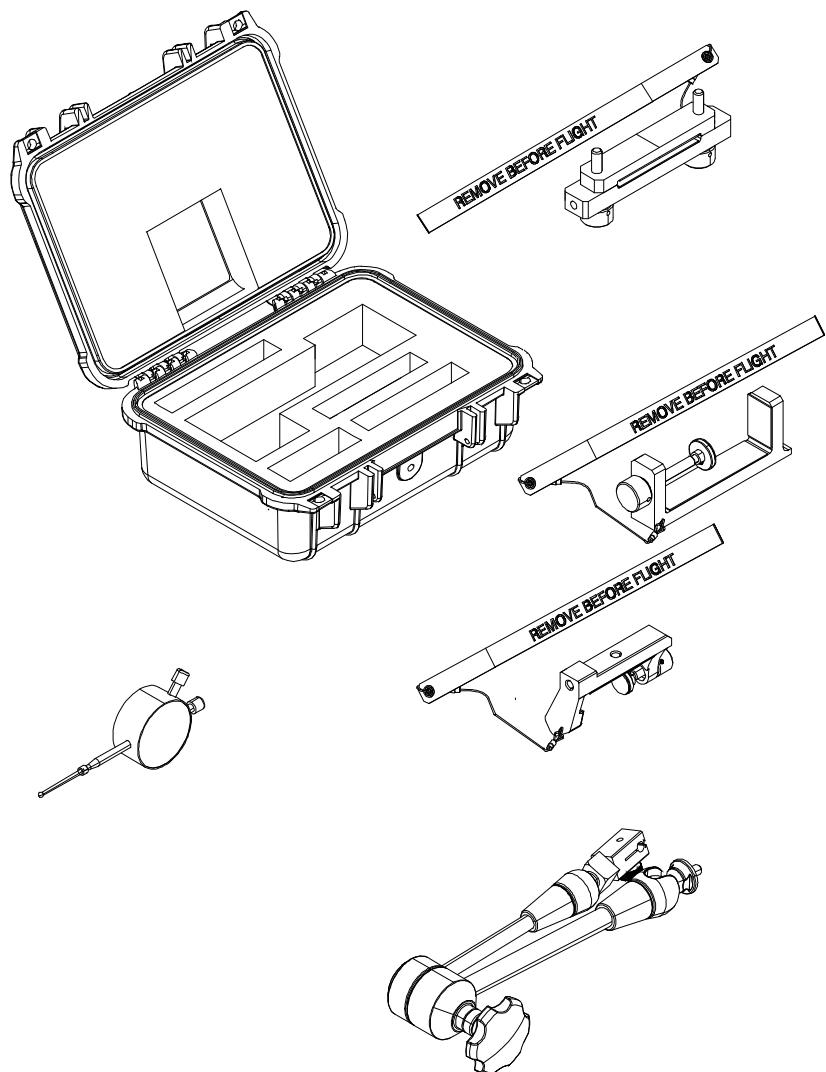



**GSE & TOOL
USE AND MAINTENANCE MANUAL**

Manual number:
MAN-8G6000G01632
REV. A

Pag. 2 of 25

REVISION HISTORY

REV	CHANGE DESCRIPTION	DATE
A	First issue	12/09/2022



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 3 of 25

SUMMARY

SUMMARY	3
LIST OF TABLE.....	4
LIST OF FIGURE	4
1. SCOPE	5
1.1. APPLICABILITY	5
1.2. OBJECT	5
1.3. WARNING AND SAFETY INSTRUCTIONS	5
2. DOCUMENTS	6
2.1. APPLICABLE DOCUMENTS.....	6
2.2. ACRONYMS USED	6
3. DESCRIPTION.....	7
4. TOP ASSEMBLY DRAWINGS.....	7
5. IDENTIFICATION.....	7
6. OVERALL DIMENSIONS	8
7. WEIGHT	8
8. MAIN PARTS	9
9. MAIN FEATURES DESCRIPTION	9
10. WARNING AND SAFETY NOTES.....	10
10.1. WARNING NOTE	10
10.2. SAFETY NOTES	11
11. STORAGE.....	12
11.1. LUBRICATION BEFORE STORAGE	12
11.2. STORAGE CONFIGURATION	12
12. MAINTENANCE	12
12.1. CLEANING	12
12.1.1. SPECIAL TOOLS, FIXTURE AND EQUIPMENT	12
12.1.2. PART REQUIREMENTS	12
12.1.3. MANUAL CLEANING.....	12
12.2. CHECKS	13
12.2.1. SPECIAL TOOLS, FIXTURE AND EQUIPMENT	13
12.2.2. VISUAL EXAMINATION	13
12.2.3. PERIODICAL CHECKS	14
12.2.4. DIMENSIONAL CHECKS	14
12.2.5. SPECIAL CHECKS SUMMARY	14
12.3. REPLACEMENT	14
12.3.1. REPLACEMENT PROCEDURES	14



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 4 of 25

13. CALIBRATION	14
14. SHELF LIFE	14
15. SPARE PARTS	15
16. CE MARKING.....	24
ANNEX A.....	25

LIST OF TABLE

Table 1 – Warning Instruction	5
Table 2 – Applicable Documents.....	6
Table 3 – Warning Note.....	10
Table 4 – Visual Check.....	13
Table 5 – Spare Parts.....	16
Table 6 – Spare Parts.....	17
Table 7 – Spare Parts.....	18
Table 8 – Spare Parts.....	19
Table 9 – Spare Parts.....	20
Table 10 – Spare Parts.....	21
Table 11 – Spare Parts.....	22
Table 12 – Spare Parts.....	23

LIST OF FIGURE

Figure 1 – Tool kit, rotors play check.	7
Figure 2 – LHD Identification tag with P/N	7
Figure 3 – Main Parts	9
Figure 4 – Safety Notes.....	11
Figure 5 – Spare Parts	15
Figure 6 – Spare Parts	17
Figure 7 – Spare Parts	18
Figure 8 – Spare Parts	19
Figure 9 – Spare Parts	20
Figure 10 – Spare Parts	21
Figure 11 – Spare Parts	22
Figure 12 – Spare Parts	23

1. SCOPE

1.1. APPLICABILITY

The contents of this document are meant to provide information on the P/N 8G6000G01632 TOOL KIT, ROTORS PLAY CHECK

1.2. OBJECT

The object of this document is to describe the AGE and its components, its main features and it will also provide all needed maintenance requirements to keep in service the P/N 8G6000G01632 TOOL KIT, ROTORS PLAY CHECK

1.3. WARNING AND SAFETY INSTRUCTIONS

A number of symbols are used throughout this document to indicate information to which the user should pay attention to. These are indicated below along with the specific meaning.

 Warning	...Indicates a danger that might arise from a product and might result in severe injuries or even death, if no precautions are taken.
 Caution	... Indicates a potentially dangerous situation, which might result injury or damage to the equipment.
 Notice	...Indicates a note providing information to help the reader during the procedure.

Table 1 – Warning Instruction



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 6 of 25

2. DOCUMENTS

2.1. APPLICABLE DOCUMENTS

The following table lists the applicable documents

REF	REFERENCE OF DOCUMENT	TITLE
N.A.	N.A.	N.A.

Table 2 – Applicable Documents

2.2. ACRONYMS USED

The main acronyms used in this document are listed below:

LHD	Leonardo Helicopter Division
HC	Helicopter
P/N	Part Number
S/N	Serial Number
N.A.	Not Applicable
TR	Tail Rotor
MR	Main Rotor

3. DESCRIPTION

The tool is used to perform play checks on MR and TR scissors, swashplate and MR damper.

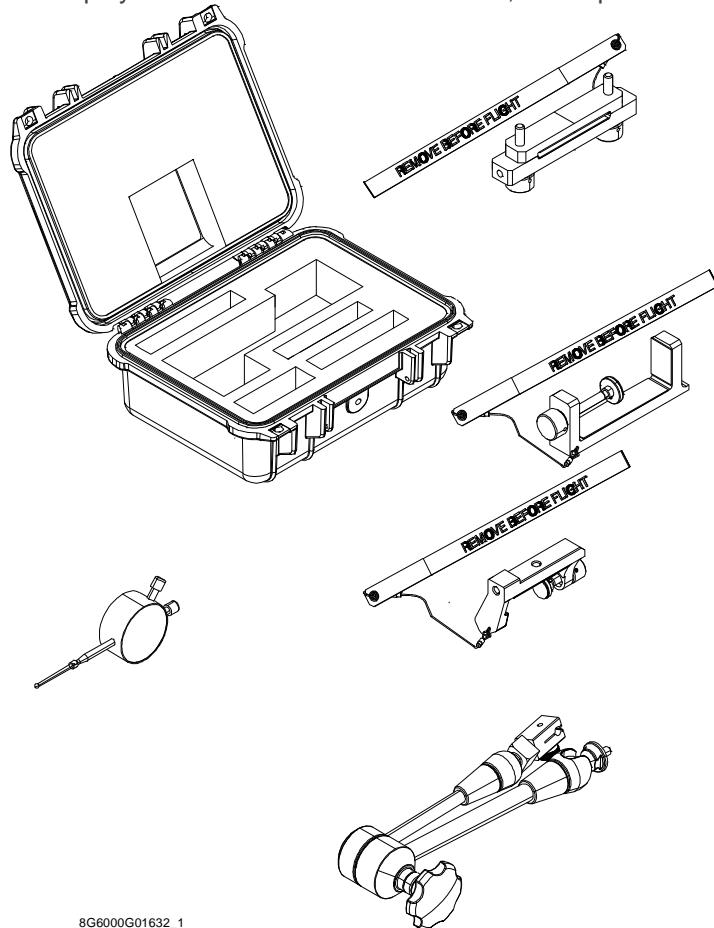


Figure 1 – Tool kit, rotors play check.

4. TOP ASSEMBLY DRAWINGS

Refer to P/N 8G6000G01632 TOOL KIT, ROTORS PLAY CHECK

5. IDENTIFICATION

The tool identification P/N is marked on the LHD identification tag.

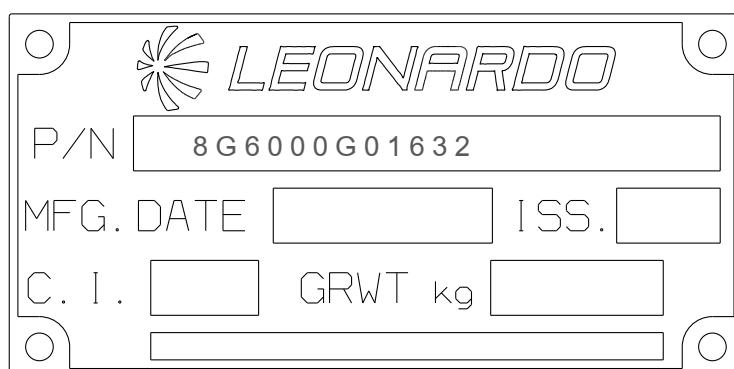


Figure 2 – LHD Identification tag with P/N



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 8 of 25

6. OVERALL DIMENSIONS

- Length: 406 mm
- Width: 330 mm
- Height: 174 mm

7. WEIGHT

- Total Weight: 6,5 kg.

8. MAIN PARTS

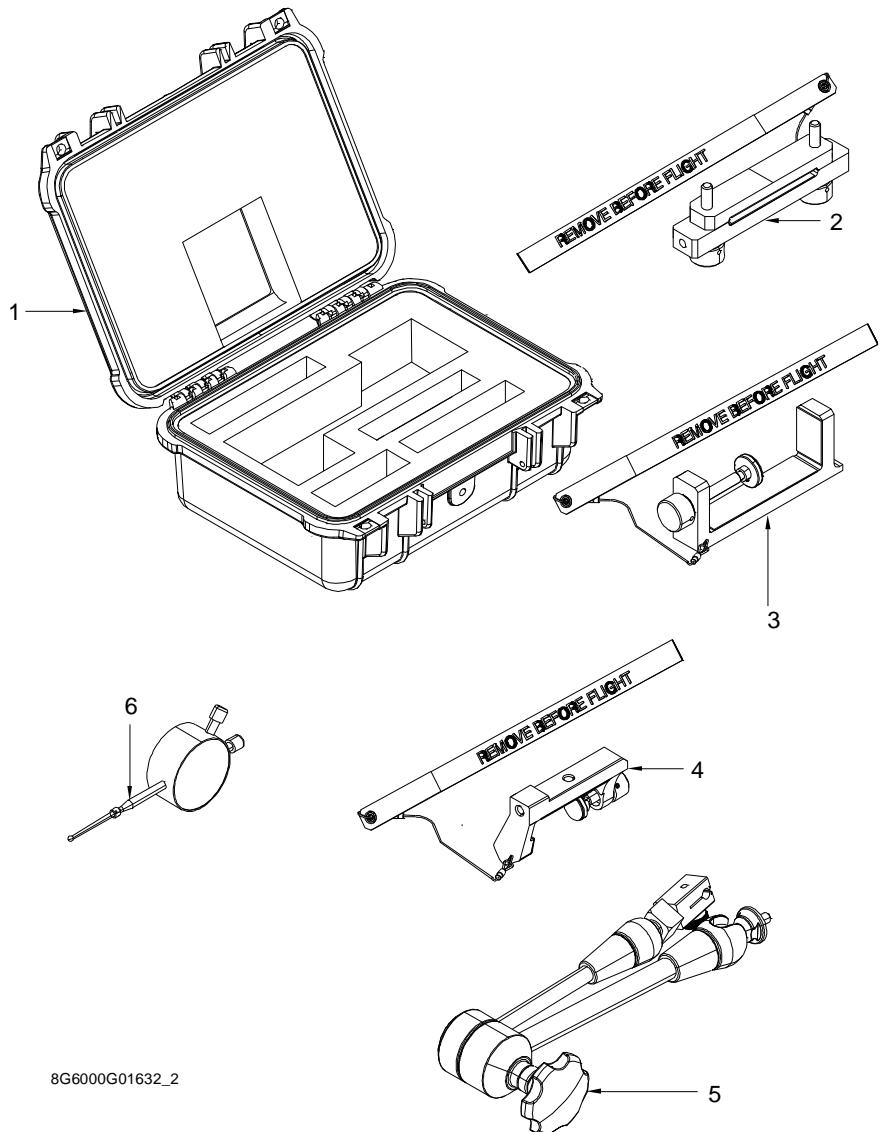


Figure 3 – Main Parts

The main parts of the TOOL KIT, ROTORS PLAY CHECK are:

1. Case assy
2. Dial gauge support
3. Dial gauge support
4. Dial gauge support
5. Support arm
6. Dial gauge with extension

9. MAIN FEATURES DESCRIPTION

The kit is composed of a case assy (1), three dial gauge support (2, 3 and 4), a support arm (5) and a dial gauge with extension (6).

10. WARNING AND SAFETY NOTES

10.1. WARNING NOTE

 Warning	Use this equipment only for the purpose that it is designed for. Any other use can result in injury or serious material damage to the components.
 Caution	The Manual can never integrally replace the adequate competence of the user.
 Warning	Before and after each use of the equipment is necessary to perform the checks required. Do not operate with a tool damaged or partially completed, or partially assembled.
 Caution	
 Notice	This Manual provides guidelines and instructions of the equipment that are in addition to - but are not intended to replace or modify but only to integrate - any general or specific rule, regulation, decree or law that is in force in the place where the equipment is in use.

Table 3 – Warning Note

10.2. SAFETY NOTES

Remember to wear protective overalls, safety shoes, protective gloves and glasses during all operational and maintenance phases.



Figure 4 – Safety Notes



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 12 of 25

11. STORAGE

The Tool shall be properly stored to provide protection from external weather conditions, damage and dirty particles.

The Kit shall be stored in the dedicated transportation box (part of the Kit).

Ensure that the tool parts are clean before storage.

11.1. LUBRICATION BEFORE STORAGE

Apply the Grease (MIL-PRF-23827) on all threaded parts before tool storage.

11.2. STORAGE CONFIGURATION

The tool has no particular storage configuration.

12. MAINTENANCE

NOTE: Correct regular maintenance allows preventing most faults and safeguards of tool performance in time, thereby making it last longer.

Every year carry out regular maintenance on a regular basis as detailed in this manual.

NOTE: Inspection intervals for tool parts placed inside in ready storage is 12 months.

12.1. CLEANING

Before inspection and after each use, carry out the cleaning of the tool components.

12.1.1. SPECIAL TOOLS, FIXTURE AND EQUIPMENT

No special tools, fixture and equipment are required for cleaning.

12.1.2. PART REQUIREMENTS

The parts to clean should be free from the moisture, emulsified water, soaps and metal shavings that can develop of corrosive acids.

They must also be free from wide grease and / or slosh deposits.

12.1.3. MANUAL CLEANING

- A. Clean thoroughly all metal surfaces with a clean lint-free cloth (Local supply) moistened with Cleaning Solvent (MIL-PRF-680C, Type II) to do general spot cleaning of large groups areas. For nylon or Teflon surfaces, the use of a biodegradable, water dilutable cleaning compound (MIL-PRF-87937 D, Type II) is required.
- B. Repeat the cleaning process again by means another clean lint-free cloth (Local supply).
- C. Drying.
 - Verify that the solvent should not be trapped in the cavity. Normally, the solvent evaporates at room temperature in a satisfactory manner.



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 13 of 25

12.2. CHECKS

Before and after each use or at least every year, carry out the check of kit component.

Before each use ensure that the manual is available to the operator, in the event of loss, request a copy to Leonardo Helicopters Division.

The Tool kit shall be submitted to following checks to guarantee the functionality.

All required checks shall be registered on CHECK RECORDS Table. Ref. *TLC_Table 1*

After each use of tool ensure to have registered the number of uses on HISTORICAL USES RECORD Table. Ref. *TLC_Table 2*

The Tool Log Card template contained in the Annex A of this manual can be replaced with any other log card template in use in the plant where the equipment is in use.

12.2.1. SPECIAL TOOLS, FIXTURE AND EQUIPMENT

No special tools, fixture and equipment are required for the checks.

12.2.2. VISUAL EXAMINATION

NOTE: Replace the parts that do not obey the inspection requirements.

Restore the marking of the parts that results damaged or not readable.

All required visual checks are listed on Table 4

PERIODICITY	CHECK TYPE	COMPONENTS
BEFORE AND AFTER EVERY USE	Evidence of impact	All
	Crushing or stripping	All
	Cracks	All
	Dents	All
	Wear	All
	Distortions	All
	Corrosion	All
	Loose or defective attaching parts (warning flag)	All
	Unsticking of parts	Item 2 , Plate Identification, Figure 5 , page 15. Item 4 , Nameplate, Figure 5 , page 15 Item 7 , Plate Identification, Figure 5 , page 15
	Damage to the threads	All
	Marking	All
	Damage to the pins and to the shell	N.A.
	Damage to the insulation sleeveers and wires	N.A.

Table 4 – Visual Check



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 14 of 25

12.2.3. PERIODICAL CHECKS

Not Applicable.

12.2.4. DIMENSIONAL CHECKS

Not Applicable.

12.2.5. SPECIAL CHECKS SUMMARY

Not Applicable.

12.3. REPLACEMENT

All the parts for which it is allowed the components replacement are listed in Paragraph 15.

12.3.1. REPLACEMENT PROCEDURES

The replacement of parts of the kit does not require specific procedures.

13. CALIBRATION

Every year you must send the Dial gauge to a Calibration center authorized in your country for proper calibration.

14. SHELF LIFE

Not Applicable.

15. SPARE PARTS

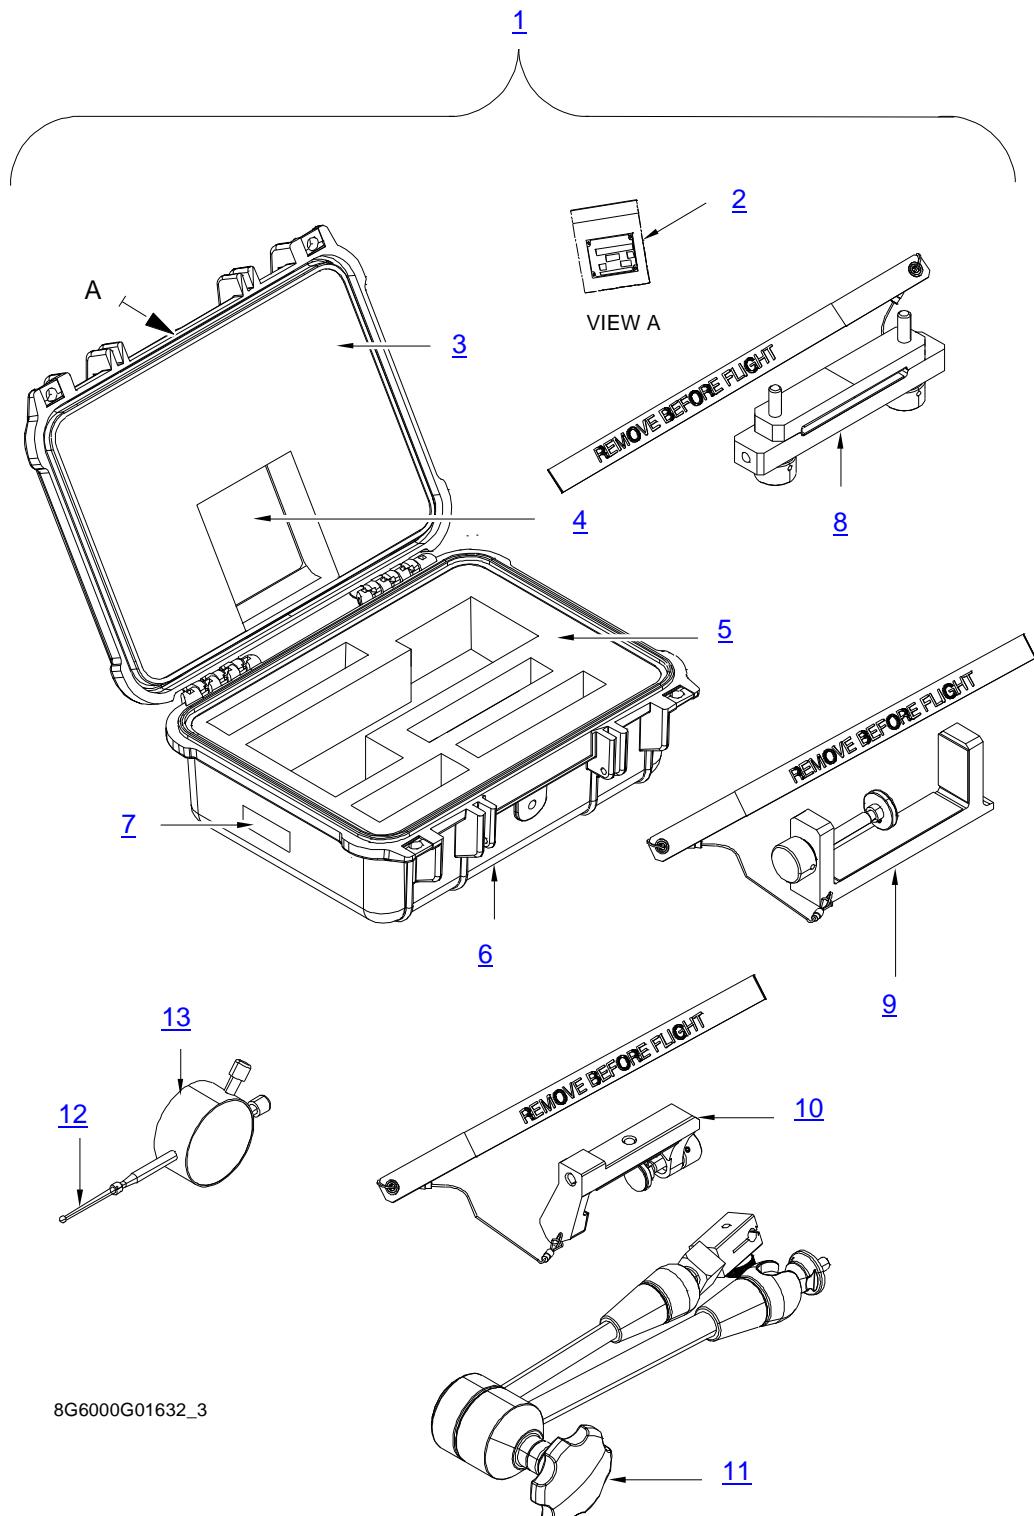


Figure 5 – Spare Parts




GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 16 of 25

ITEM	P/N	DESCRIPTION	Q.TY
1	8G6000G01632	TOOL KIT, ROTORS PLAY CHECK	REF
2	A304A004A1	PLATE, IDENTIFICATION	1
3	8G6000G01751	UPPER FOAM	1
4	8G6000G01952	NAMEPLATE	1
5	8G6000G01851	LOWER FOAM	1
6	1450	CASE	1
7	A304A005A1	PLATE, IDENTIFICATION	1
8	3G6005G01631	SUPPORT, DIAL GAUGE (M/R A SWASHPL./SCISSORS) (For Breakdown ref. to Fig. 6 and Table 6)	1
9	8G6000G02031	SUPPORT, DIAL GAUGE (For Breakdown ref. to Fig. 9 and Table 9)	1
10	8G6000G02431	SUPPORT, DIAL GAUGE (For Breakdown ref. to Fig. 11 and Table 11)	1
11	3G6005G04751	SUPPORT ARM, DIAL GAUGE	1
12	1500019	EXTENSION, DIAL GAUGE	1
13	1502251	DIAL GAUGE	1

Table 5 – Spare Parts

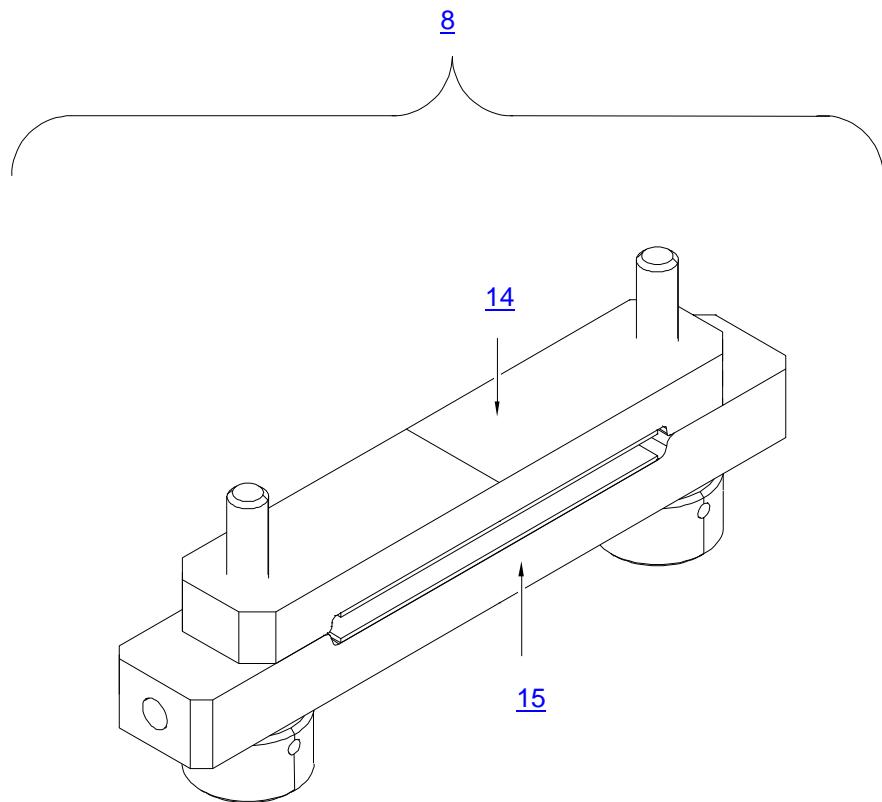


8G6000G01632_4

Figure 6 – Spare Parts

ITEM	P/N	DESCRIPTION	Q.TY
8	3G6005G01631	SUPPORT, DIAL GAUGE (M/R A SWASHPL./SCISSORS).	REF
14	3G6005G03931	UPPER HALF SUPPORT ASSY (For Breakdown ref. to Fig. 7 and Table 7)	1
15	3G6005G03631	LOWER HALF SUPPORT ASSY (For Breakdown ref. to Fig. 8 and Table 8)	1

Table 6 – Spare Parts

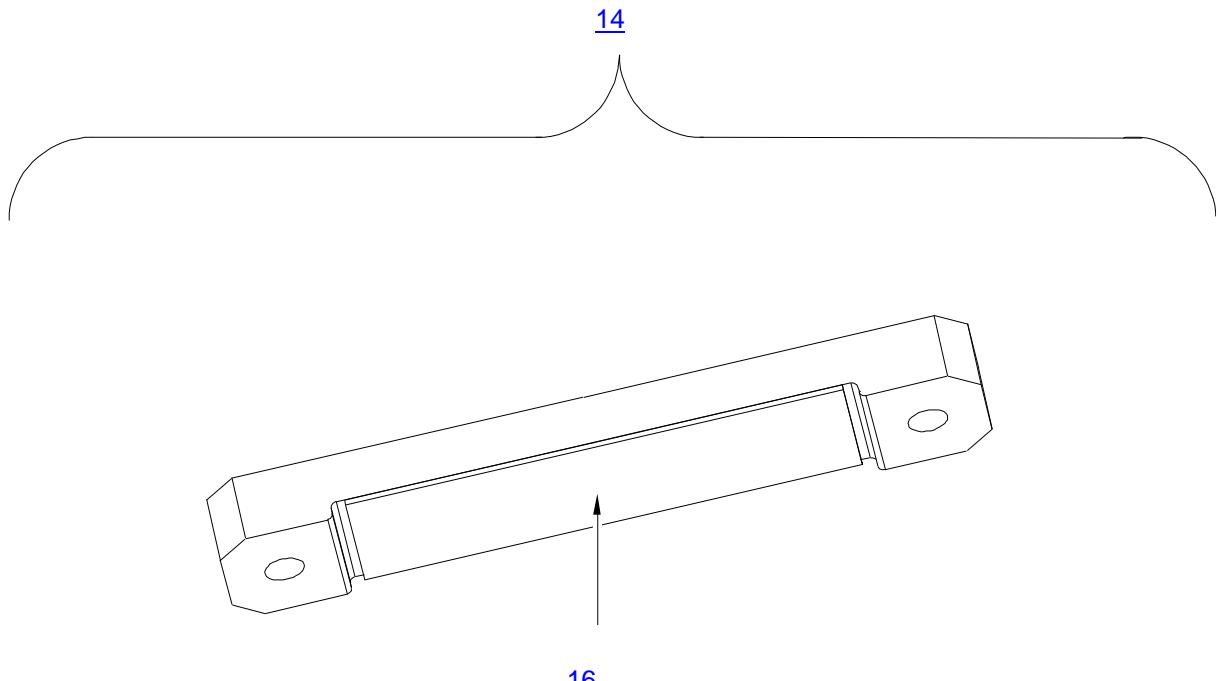

8G6000G01632_5

Figure 7 – Spare Parts

ITEM	P/N	DESCRIPTION	Q.TY
14	3G6005G03931	UPPER HALF SUPPORT ASSY	REF
16	3G6005G03851	PROTECTION	1

Table 7 – Spare Parts


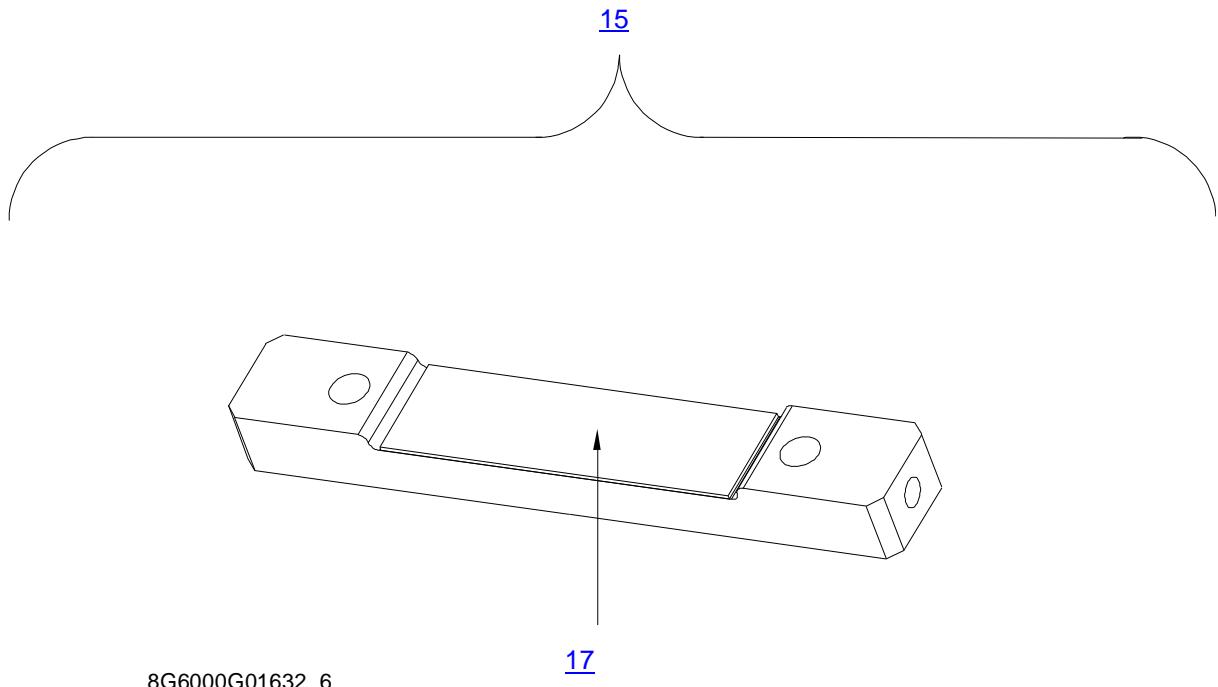


Figure 8 – Spare Parts

ITEM	P/N	DESCRIPTION	Q.TY
15	3G6005G03631	LOWER HALF SUPPORT ASSY	REF
17	3G6005G03851	PROTECTION	1

Table 8 – Spare Parts

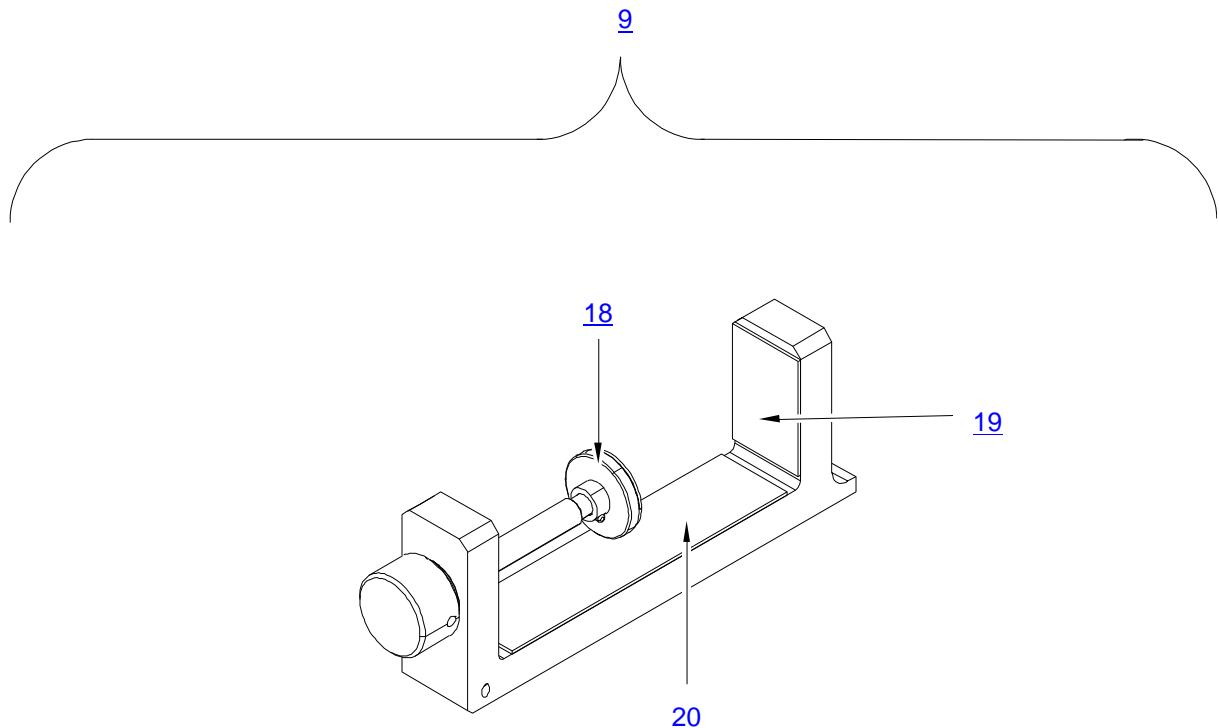


8G6000G01632_7

Figure 9 – Spare Parts

ITEM	P/N	DESCRIPTION	Q.TY
9	8G6000G02031	SUPPORT, DIAL GAUGE	REF
18	8G6000G03331	STOP ASSY (For Breakdown ref. to Fig. 10 and Table 10)	1
19	8G6000G02151	PROTECTION	1
20	8G6000G02251	PROTECTION	1

Table 9 – Spare Parts

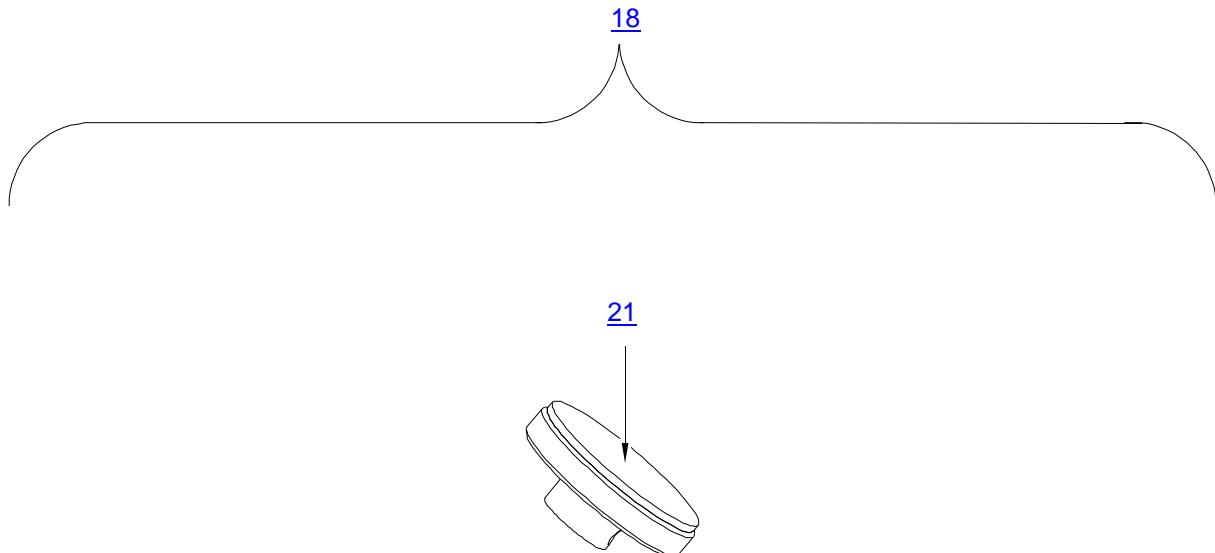


8G6000G01632_8

Figure 10 – Spare Parts

ITEM	P/N	DESCRIPTION	Q.TY
18	8G6000G03331	STOP ASSY	REF
21	3G6005G03551	PROTECTION	1

Table 10 – Spare Parts


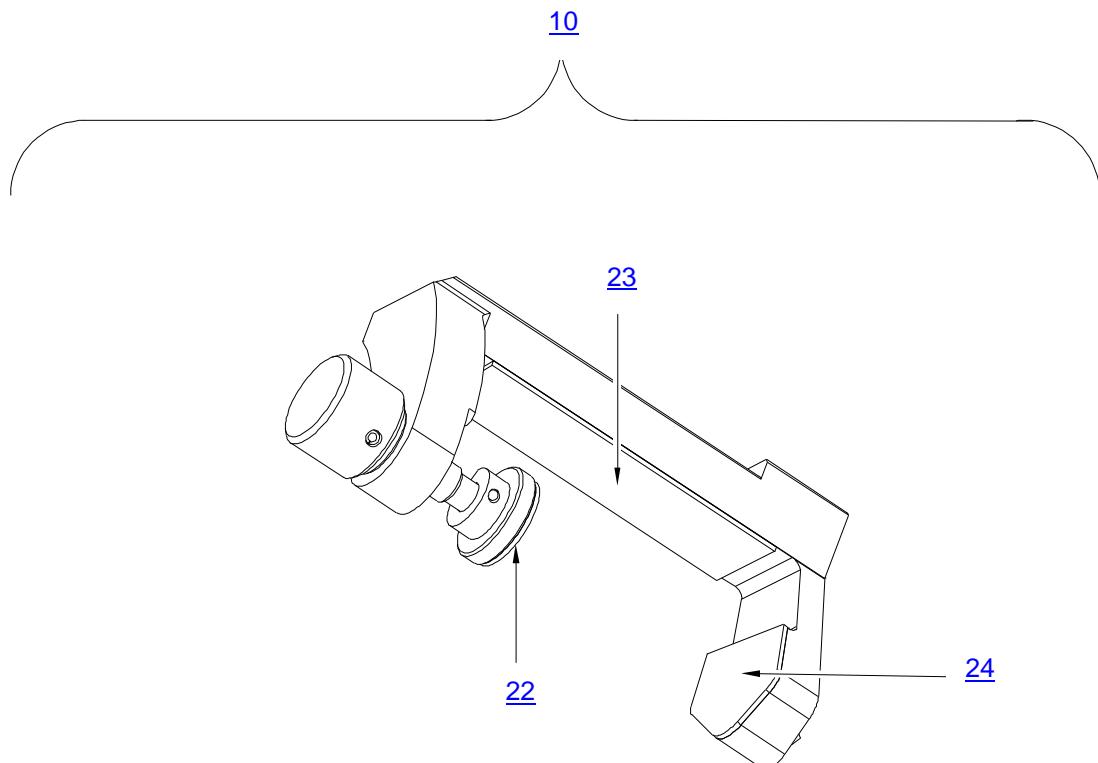


8G6000G01632_9

Figure 11 – Spare Parts

ITEM	P/N	DESCRIPTION	Q.TY
10	8G6000G02431	SUPPORT DIAL GAUGE	REF
22	8G6000G03131	STOP ASSY (For Breakdown ref. to Fig. 12 and Table 12)	1
23	8G6000G02651	PROTECTION	1
24	8G6000G02751	PROTECTION	1

Table 11 – Spare Parts

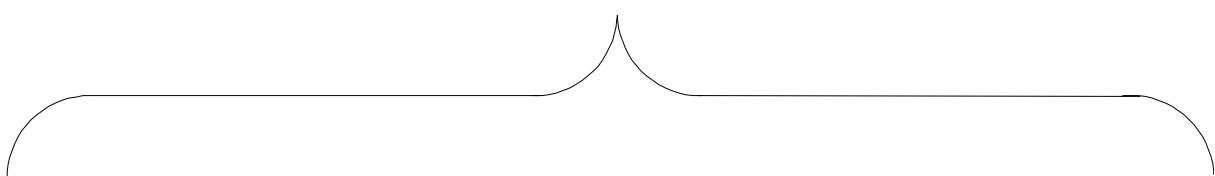22

8G6000G01632_10

Figure 12 – Spare Parts

ITEM	P/N	DESCRIPTION	Q.TY
22	8G6000G03131	STOP ASSY	REF
25	3G6005G03551	PROTECTION	1

Table 12 – Spare Parts



GSE & TOOL USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 24 of 25

16. CE MARKING

No CE marking is required for the P/N 8G6000G01632 TOOL KIT, ROTORS PLAY CHECK



GSE & TOOL
USE AND MAINTENANCE MANUAL

Manual number:
MAN-8G6000G01632
REV. A

Pag. 25 of 25

ANNEX A

TOOL LOG CARD



TOOL LOG CARD

ISSUE -/
Pag. 1 of 3

TOOL KIT P/N: [1]	TOOL KIT DESCRIPTION: [2]	TOOL KIT S/N: [3]
TOOL P/N: [4]	TOOL S/N: [5]	REMARKS: [6]

Section 1: CHECKS RECORD									
[7] N° check	[8] DATE	[9] P/N TO CHECK	[10] CHECK	[11] FREQUENCY	[12] RESULT	[13] NOTE	CERTIFICATION [14] STAMP & SIGNATURE [15]		
1									
2									
3									
4									
5									
6									
7									
8									
9									
10									

FINAL ACCEPTANCE [16]

STAMP & SIGNATURE [17]	DATE [18]

TLC_Table 1



TOOL LOG CARD

ISSUE -/
Pag. 2 of 3

TOOL KIT P/N: [1]	TOOL KIT DESCRIPTION: [2]	TOOL KIT S/N: [3]
TOOL P/N: [4]	TOOL S/N: [5]	REMARKS: [6]

Section 2: HISTORICAL USES RECORD							
[19] N°USE	[8] DATE	[6] NOTE	CERTIFICATION [13]	[19] N°USE	[8] DATE	[6] NOTE	CERTIFICATION [13]
			STAMP & SIGNATURE [14]				STAMP & SIGNATURE [14]
1				11			
2				12			
3				13			
4				14			
5				15			
6				16			
7				17			
8				18			
9				19			
10				20			

TLC_Table 2

LOG CARD FILLING INSTRUCTIONS

FIELD #	HEADER	NOTE
1	Part number of the tool Kit	
2	Tool Kit denomination	
3	Serial Number of the tool Kit	
4	Part Number of the tool (part of kit)	
5	Serial Number of the tool (if applicable)	
6	Indicate any details of the use	
7	Sequential number of check performed	
8	Date of the activity	
9	PN of tool or component (part of tool) checked/affected by issue	
10	Typology or description of checks /issue	
11	Check frequency	
12	Check result	
13	Check remarks	
14	Performance certification	
15	Stamp and signature of the personnel which performs the check	
16	Section related to the final approval	
17	Stamp and signature of the personnel which performs the final approval	
18	Date on which the final check was made	
19	Sequential number of performed used of the tool	